

# FRONIUS GALVO

/ The future-proof inverter for small self-consumption systems.



/ PC board replacement process



/ Mounting system



/ HF transformer switchover



/ WLAN interface



/ Open data communication



/ Smart Grid Ready

/ With power categories ranging from 1.5 to 3.1 kW, the Fronius Galvo is perfect for households – and is especially suitable for self-consumption systems. The integrated energy management relay allows the self-consumption component to be maximised. A host of other smart features make the Fronius Galvo one of the most future-proof inverters in its class: for example, the integrated datalogging, the simple connection to the internet by WLAN, or the plug-in card technology for retrofitting additional functions.

## TECHNICAL DATA FRONIUS GALVO


INPUT DATA	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1 <sup>1)</sup>	GALVO 3.1-1
DC maximum power at $\cos \varphi = 1$	1,580 W	2,140 W	2,630 W	3,210 W	3,320 W
Max. input current ( $I_{dc \max}$ )	13.3 A	17.8 A	16.2 A	19.5 A	20.2 A
Max. array short circuit current	20.0 A	26.7 A	24.2 A	29.1 A	30.2 A
Min. input voltage ( $U_{dc \min}$ )		120 V		165 V	
Feed-in start voltage ( $U_{dc \text{ start}}$ )		120 V		165 V	
Nominal input voltage ( $U_{dc r}$ )		260 V		330 V	
Max. input voltage ( $U_{dc \max}$ )		420 V		550 V	
MPP voltage range ( $U_{mpp \min} - U_{mpp \max}$ )		120 - 335 V		165 - 440 V	
Number of DC connections			3		

OUTPUT DATA	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1 <sup>1)</sup>	GALVO 3.1-1
AC nominal output ( $P_{ac r}$ )	1,500 W	2,000 W	2,500 W	3,000 W	3,100 W
Max. output power	1,500 VA	2,000 VA	2,500 VA	3,000 VA	3,100 VA
Max. output current ( $I_{ac \max}$ )	6.8 A	9.1 A	11.4 A	13.6 A	14.1 A
Grid connection ( $U_{ac r}$ )			1-NPE 230 V		
Min. output voltage ( $U_{ac \min}$ )			180 V		
Max. output voltage ( $U_{ac \max}$ )			270 V		
Frequency ( $f_r$ )			50 Hz / 60 Hz		
Frequency range ( $f_{\min} - f_{\max}$ )			45 - 65 Hz		
Total harmonic distortion			< 3.5 %		
Power factor ( $\cos \varphi_{ac r}$ )			0.85 - 1 ind. / cap.		


GENERAL DATA	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1 <sup>1)</sup>	GALVO 3.1-1
Dimensions (height x width x depth)			645 x 431 x 204 mm		
Weight			16.8 kg		
Degree of protection			IP 55		
Protection class			1		
Overvoltage category (DC / AC)			2 / 3		
Night-time consumption			< 1 W		
Inverter concept			HF transformer		
Cooling			Regulated air cooling		
Installation			Indoor and outdoor installation		
Ambient temperature range			-25 - +50 °C		
Permitted humidity			0 to 100 %		
DC connection technology			Screw terminal connection 2.5 mm <sup>2</sup> - 16 mm <sup>2</sup>		
Mains connection technology			Screw terminal connection 2.5 mm <sup>2</sup> - 16 mm <sup>2</sup>		
Certificates and compliance with standards	ÖVE / ÖNORM E 8001-4-712, AS 4777-2, AS 4777-3, AS3100, DIN V VDE 0126-1-1/A1, VDE AR N 4105, IEC 62109-1-2, IEC 62116, IEC 61727, CER 06-190, CEI 0-21, EN 50438, G83, G59				

<sup>1)</sup> available for countries where 3kW restrictions apply. Further information regarding the availability of the inverters in your country can be found at [www.fronius.com](http://www.fronius.com).

## FRONIUS GALVO 3.1-1 EFFICIENCY CURVE

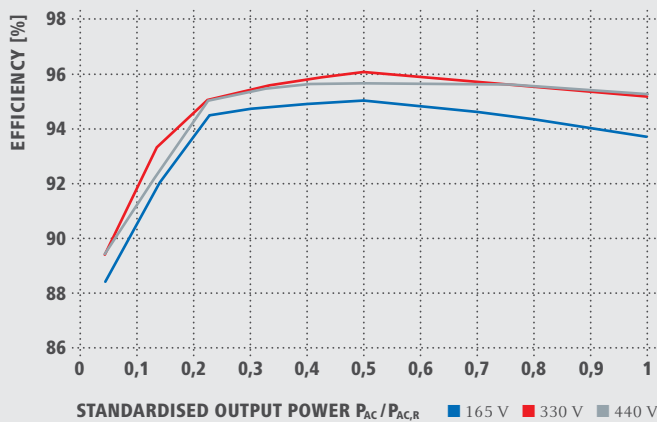

## FRONIUS GALVO 3.1-1 TEMPERATURE DERATING

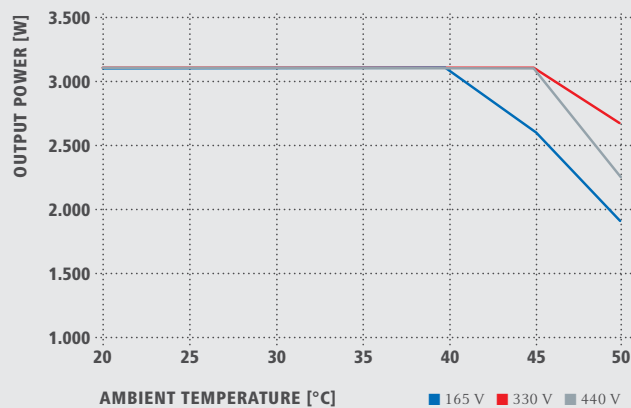

## TECHNICAL DATA FRONIUS GALVO

EFFICIENCY	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1 <sup>1)</sup>	GALVO 3.1-1
Max. efficiency	95.9 %	96.0 %		96.1 %	
European efficiency ( $\eta_{EU}$ )	94.5 %	94.9 %	95.2 %	95.4 %	95.4 %
$\eta$ at 5 % $P_{Ac,r}$ <sup>2)</sup>	84.5 / 86.0 / 86.0 %	84.2 / 86.1 / 85.9 %	88.6 / 89.6 / 89.4 %	88.2 / 89.2 / 89.1 %	88.4 / 89.4 / 89.4 %
$\eta$ at 10 % $P_{Ac,r}$ <sup>2)</sup>	87.5 / 89.7 / 89.6 %	89.6 / 91.4 / 91.3 %	91.2 / 92.3 / 91.4 %	91.8 / 93.1 / 92.1 %	91.9 / 93.3 / 92.3 %
$\eta$ at 20 % $P_{Ac,r}$ <sup>2)</sup>	91.3 / 93.3 / 93.1 %	92.6 / 94.3 / 93.9 %	94.0 / 94.8 / 94.5 %	94.4 / 95.0 / 94.9 %	94.5 / 95.0 / 95.0 %
$\eta$ at 25 % $P_{Ac,r}$ <sup>2)</sup>	92.4 / 94.1 / 93.9 %	93.3 / 94.9 / 94.5 %	94.5 / 95.1 / 95.0 %	94.8 / 95.5 / 95.3 %	94.8 / 95.5 / 95.4 %
$\eta$ at 30 % $P_{Ac,r}$ <sup>2)</sup>	93.0 / 94.6 / 94.3 %	93.6 / 95.2 / 94.9 %	94.8 / 95.5 / 95.3 %	94.8 / 95.7 / 95.6 %	94.9 / 95.8 / 95.6 %
$\eta$ at 50 % $P_{Ac,r}$ <sup>2)</sup>	93.9 / 95.5 / 95.2 %	94.3 / 95.8 / 95.2 %	95.0 / 95.7 / 95.2 %	95.0 / 96.0 / 95.5 %	95.0 / 96.1 / 95.6 %
$\eta$ at 75 % $P_{Ac,r}$ <sup>2)</sup>	94.2 / 95.6 / 95.4 %	94.0 / 95.9 / 95.6 %	94.8 / 95.9 / 95.6 %	94.6 / 95.8 / 95.6 %	94.5 / 95.6 / 95.6 %
$\eta$ at 100 % $P_{Ac,r}$ <sup>2)</sup>	94.0 / 95.9 / 95.6 %	93.5 / 95.6 / 95.5 %	94.4 / 95.7 / 95.5 %	93.9 / 95.4 / 95.3 %	93.7 / 95.2 / 95.3 %
MPP adaptation efficiency			> 99.9 %		

PROTECTION DEVICES	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1 <sup>1)</sup>	GALVO 3.1-1
DC insulation measurement		Warning/shutdown (depending on country setup) at $R_{ISO} < 600 \text{ k}\Omega$			
Overload behavior		Operating point shift, power limitation			
DC circuit breaker		Included			

INTERFACES	GALVO 1.5-1	GALVO 2.0-1	GALVO 2.5-1	GALVO 3.0-1 <sup>1)</sup>	GALVO 3.1-1
WLAN / Ethernet LAN		Fronius Solar.web / Fronius Solar.web, Modbus TCP, JSON			
6 inputs or 4 digital inputs/outputs		Interface to ripple control receiver			
USB (A socket) <sup>3)</sup>		For USB sticks			
2x RS422 (RJ45 socket) <sup>3)</sup>		Fronius Solar Net, interface protocol			
S0 input / signalling output <sup>3)</sup>		Energy management (4-20 mA input / potential-free relay output)			
Datalogger and Webserver		Included			

<sup>1)</sup> available for countries where 3kW restrictions apply. <sup>2)</sup> and at  $U_{mpp \text{ min}} / U_{dc,r} / U_{mpp \text{ max}}$ . <sup>3)</sup> also available in the light version. Further information regarding the availability of the inverters in your country can be found at [www.fronius.com](http://www.fronius.com).

/ Battery Charging Systems / Welding Technology / Solar Electronics

## WE HAVE THREE DIVISIONS AND ONE PASSION: SHIFTING THE LIMITS.

/ Whether Battery Charging Systems, Welding Technology or Solar Electronics - our goal is clearly defined: to be the technology and quality leader. With around 3,000 employees worldwide, we shift the limits of what's possible - our more than 850 active patents are testimony to this. While others progress step by step, we innovate in leaps and bounds. Further information about all Fronius products and our global sales partners and representatives can be found at [www.fronius.com](http://www.fronius.com)



v02 2012 EN

Fronius Australia Pty Ltd.  
90-92 Lambeck Drive  
Tullamarine VIC 3043  
Australia  
pv-sales-australia@fronius.com  
www.fronius.com.au

Fronius UK Limited  
Maidstone Road, Kingston  
Milton Keynes, MK10 0BD  
United Kingdom  
pv-sales-uk@fronius.com  
www.fronius.co.uk

Fronius International GmbH  
Froniusplatz 1  
4600 Wels  
Austria  
pv@fronius.com  
www.fronius.com